



Audio-Übertrager für Line-Signale
Audio transformer for Line signals




DC-Widerstände / DC-Resistances
Résistances DC / Resistenze DC


Transformateur audio pour signaux LINE
Trasformatore audio per segnali Line




Ansicht von unten / View from below
Vue de dessous / Visto dal basso



grüne Markierung auf der Oberseite
green marking on the upper side
repère vert sur la face supérieure
segno verde in alto

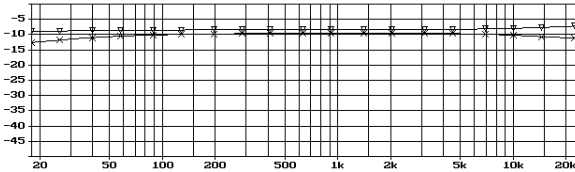

Frequenzgang (Quellimpedanz: x = 600 Ω, ∇ = 50 Ω)
Frequency response (source impedance: x = 600 Ω, ∇ = 50 Ω)
Courbe de réponse en fréquence (Imp. source: x = 600 Ω, ∇ = 50 Ω)
Risposta in frequenza (imp. di source: x = 600 Ω, ∇ = 50 Ω)

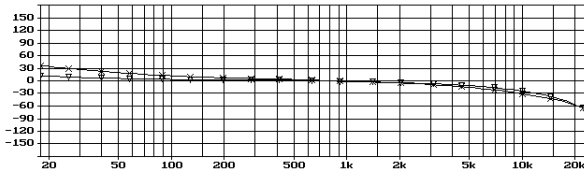

Phasengang (Quellimpedanz: x = 600 Ω, ∇ = 50 Ω)
Phase response (source impedance: x = 600 Ω, ∇ = 50 Ω)
Courbe de réponse de la phase (Imp. source: x = 600 Ω, ∇ = 50 Ω)
Risposta in fase (imp. di source: x = 600 Ω, ∇ = 50 Ω)

D — Technische Daten

Frequenzbereich 15–30 000 Hz
Übersetzungsverhältnis 1 : 1 + 0,5
Eingangsimpedanz 600 Ω
Ausgangsimpedanz 600 Ω + 300 Ω
Optimale Quellimpedanz 50–600 Ω
Optimale Lastimpedanz ≥ 5 kΩ
Max. Eingangsspannung
(1 % Klirrfaktor/40 Hz) 5 V
Abmessungen (B × H × T) 25 × 20 × 21 mm

GB — Specificatons

Frequency Range 15–30 000 Hz
Ratio 1 : 1 + 0.5
Input Impedance 600 Ω
Output Impedance 600 Ω + 300 Ω
Optimum Source Imp. 50-600 Ω
Optimum Load Impedance ≥ 5 kΩ
Max. Input Voltage
(1 % THD/40 Hz) 5 V
Dimensions (W × H × D) 25 × 20 × 21 mm

F — Caractéristiques techniques

Bande passante 15–30 000 Hz
Rapport 1 : 1 + 0,5
Impédance d'entrée 600 Ω
Impédance de sortie 600 Ω + 300 Ω
Impédance source optimale 50–600 Ω
Imp. de charge optimale ≥ 5 kΩ
Tension maximale d'entrée
(1 % taux de distortion/40 Hz) 5 V
Dimensions (L × H × P) 25 × 20 × 21 mm

I — Dati tecnici

Banda passante 15–30 000 Hz
Rapporto di trasformazione 1 : 1 + 0,5
Impedenza d'ingresso 600 Ω
Impedenza d'uscita 600 Ω + 300 Ω
Impedenza ottimale di source 50–600 Ω
Impedenza ottimale di carico ≥ 5 kΩ
Tensione max. d'ingresso
(1 % THD/40 Hz) 5 V
Dimensioni (L × H × P) 25 × 20 × 21 mm